


Link Box Lite

High Voltage Cable Systems
Cable Sheath Earthing

**NEW
2018**

SWITCHGEAR

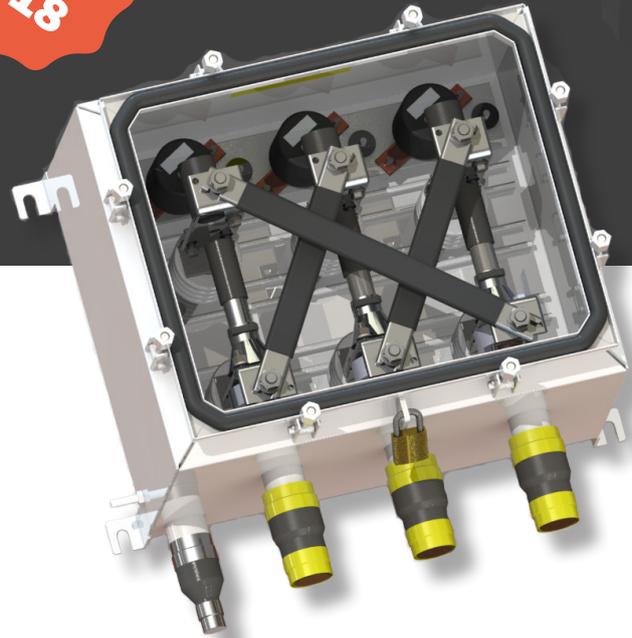

The Insulect Link Box Lite provides the same weatherproof environment as our standard Link Box range, but in a lightweight construction. It is available in 304 and 316 stainless steel, and is designed to suit above and below ground applications.



Comprehensive range

Link boxes of all types for single core and concentric bonding cables.



Choice of 304 or 316

Fully tested and fully sealed SS304 or SS316 enclosures, rated at a minimum of IP67.



Above or below ground

Universal design to suit indoor, outdoor and in-pit installation.



Local design and manufacture

Designed, manufactured and tested in Australia for over twenty years.

Features

LINK BOX DESIGN


We have several link box designs that use various earthing practices to minimise sheath currents and provide sheath voltage protection. We readily meet individual customer requirements with custom designs.

- Direct earthing and earthing through a sheath voltage limiter (SVL) surge arresters.
- Cross bonding with appropriate insulation withstand between phases.
- Provision of metal oxide SVL sheath voltage surge limiters for the protection of the HV cable sheath
- Single core and coaxial (concentric) bonding cable type terminations.

SHEATH VOLTAGE LIMITERS (SVL)

We manufacture our own quality range of 20kA Zinc Oxide SVLs in our Australian plant. See our separate SVL datasheet for detailed information.

Typical Configurations

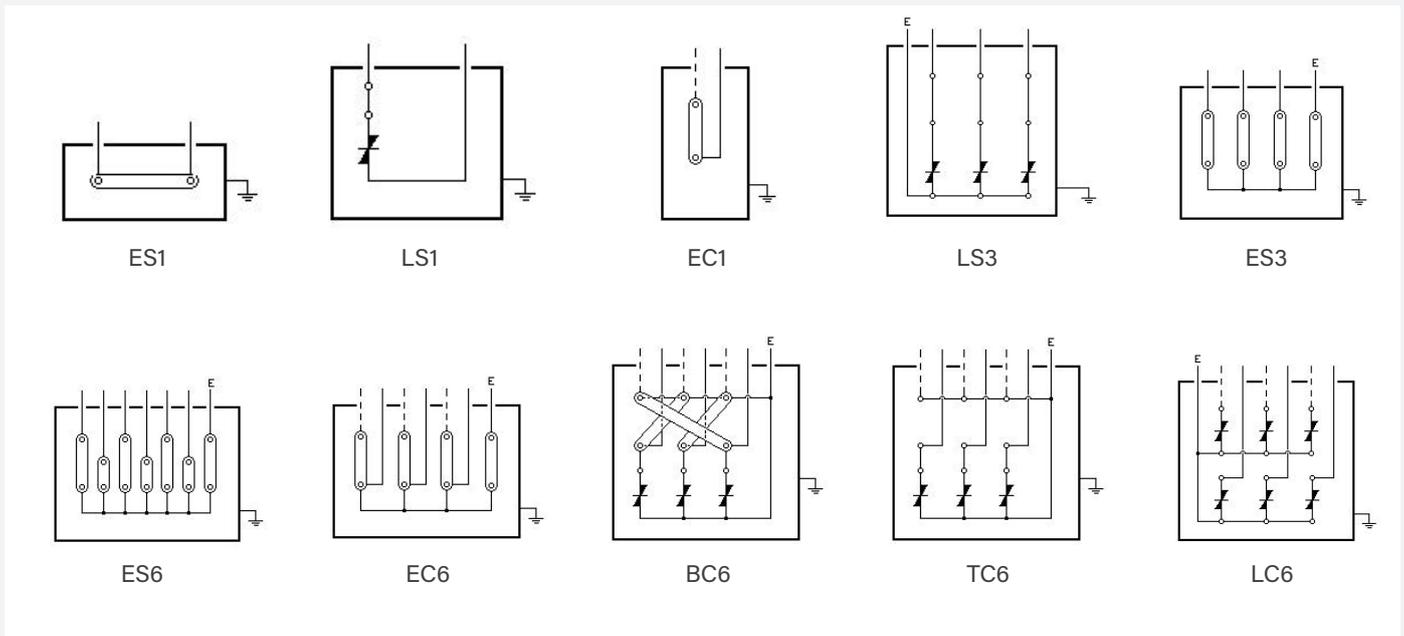

Other Specifications

Housing: 304/316 stainless steel for housing & lid.

Links: plated hard drawn copper.

Plating: all conductors plated with $\geq 8\mu\text{m}$ of tin.

Stress cones: polyurethane elastomer.

Insulators: high strength porcelain, stainless steel hardware.

Through Current Withstand: tested to short circuit withstand current up to 63kA. Alternative testing available.

Internal Power Arc: 20kA 0.1 sec

Voltage Withstand - Cross Bonding Boxes: Insulation is $\geq 60\text{kV}$ impulse phase-to-phase and $\geq 30\text{kV}$ impulse phase-to-earth. For link boxes fitted with SVL arresters, refer to technical data sheet for more information.

Voltage Withstand - Solid Earthing Link Boxes: 25kVdc phase-to-phase and phase-to-earth.

Contact Resistance: The link box terminal to the link and to the cable termination are $\leq 5\mu\Omega$

Ordering Information

Select the required design configuration (use the selection table for the part number). When requesting a quotation please include:

- Pit or structure mounted
- Cable size of bonding and earth cables
- If cross bonding or SVL earthing boxes
- Any special requirements or modifications which you may require

Insulect Australia


p: 1300 446 565

e: sales@insulect.com

w: insulect.com

Link Box Code Example

M L C 6 S - B

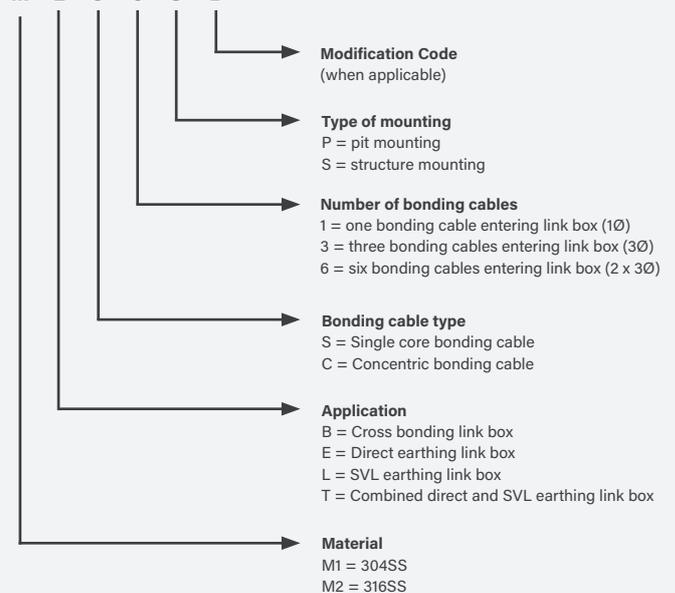

DISCLAIMER: The information in this document is believed to be correct at the time of publication. The user is responsible for determining whether the product is fit for a particular purpose and suitable for user's method of use or application. No reliance may be placed on any such information or data without first contacting Insulect Australia to clarify individual user requirements.